



Designed specifically for the Australian market, FSA's MEGA Jambliner system combines the aesthetics and functionality of traditional double hung windows with modern technologies to achieve a best of both worlds situation.

Now you can have a double hung window that looks great, functions consistently all year round and caters for double glazing as standard. This allows you to achieve the higher thermal, acoustic and performance ratings that are required for today's buildings.



FEATURE

- Co-Extruded PVC Technology
- Interchangeable Balance system
- Sash weights up to 45kg
- Sash sizes up to 1200mm high and 1200mm wide
- In Built Tilt functionality
- Snap in Installation
- Independent sash operation
- Heavy Duty Adjustable Clutch

BENEFIT



- Compensates for movement in Timber
- Eliminates jamming and rattling of sashes
- Thermally efficient
- Provides flexibility across a range of sash sizes and glass configurations
- Simple cost effective replacement if required
- Caters for single or double glazing in the system – no changes to manufacturing.
- Improved thermal and acoustic performance of the system
- Large openings can be catered for clear views
- Sash can be tilted in for cleaning external face
- Easy sash removal for maintenance or painting
- Significant reduction in manufacturing times compared to traditional systems
- On-site maintenance simple and quick
- Can open top or bottom sash only
- Provides smooth and consistent operation
- Allows finite friction adjustment if required

PROFILE REQUIREMENTS

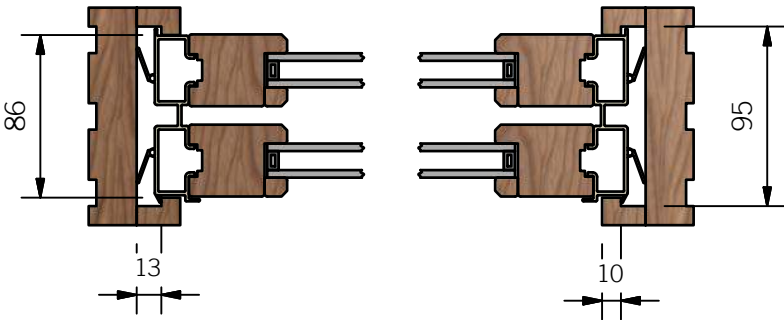


Available in Beige & White


CLUTCH FUNCTION:

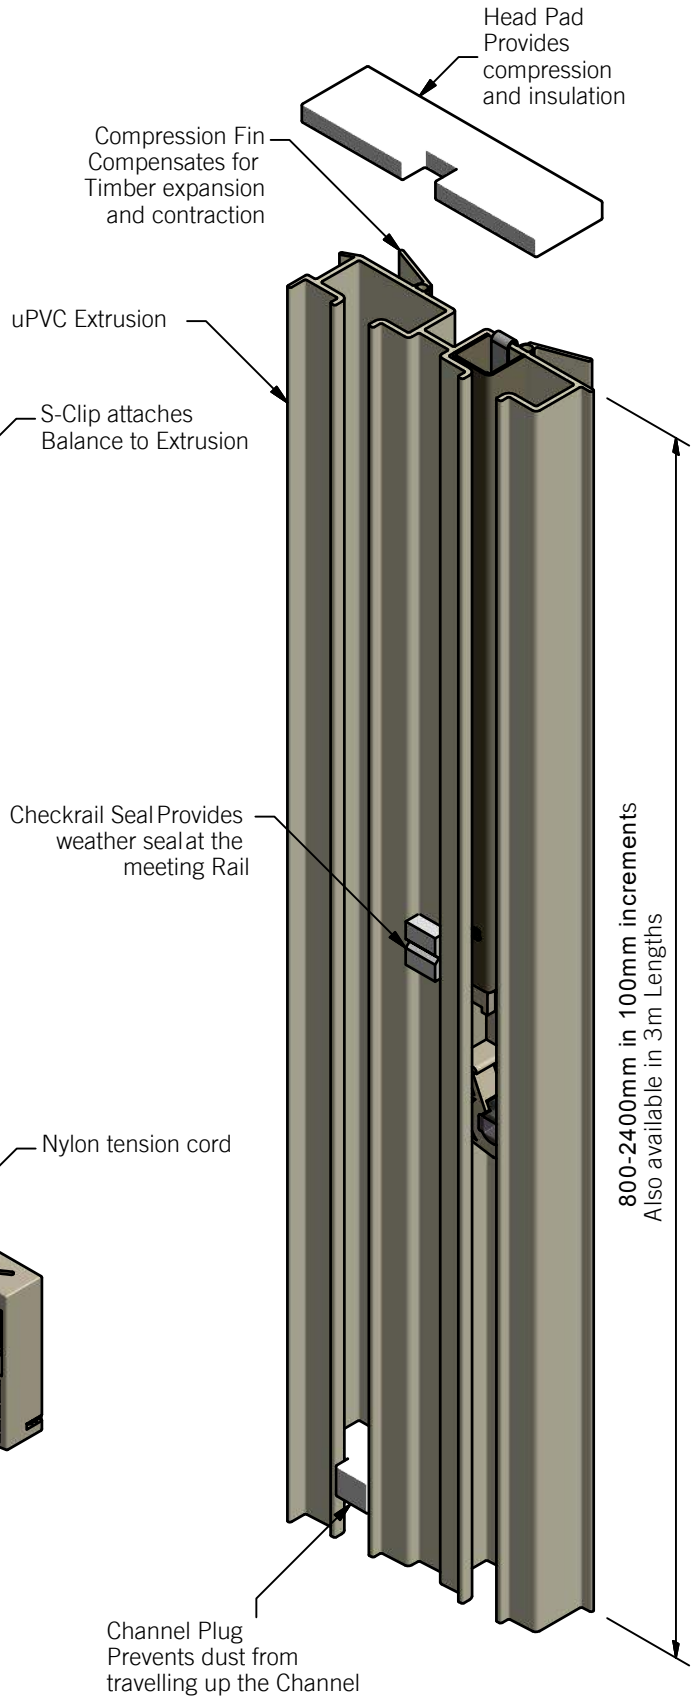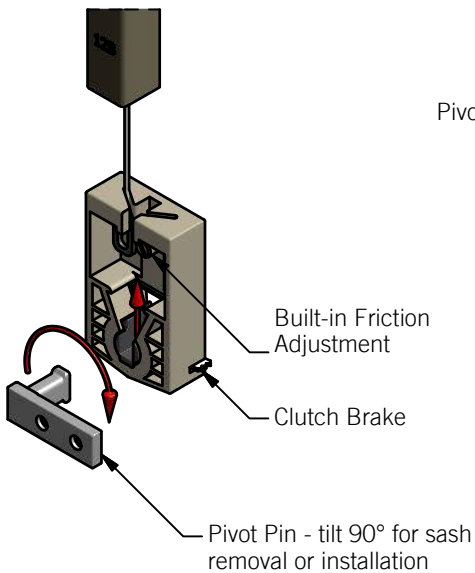


TECHNICAL SPECIFICATIONS

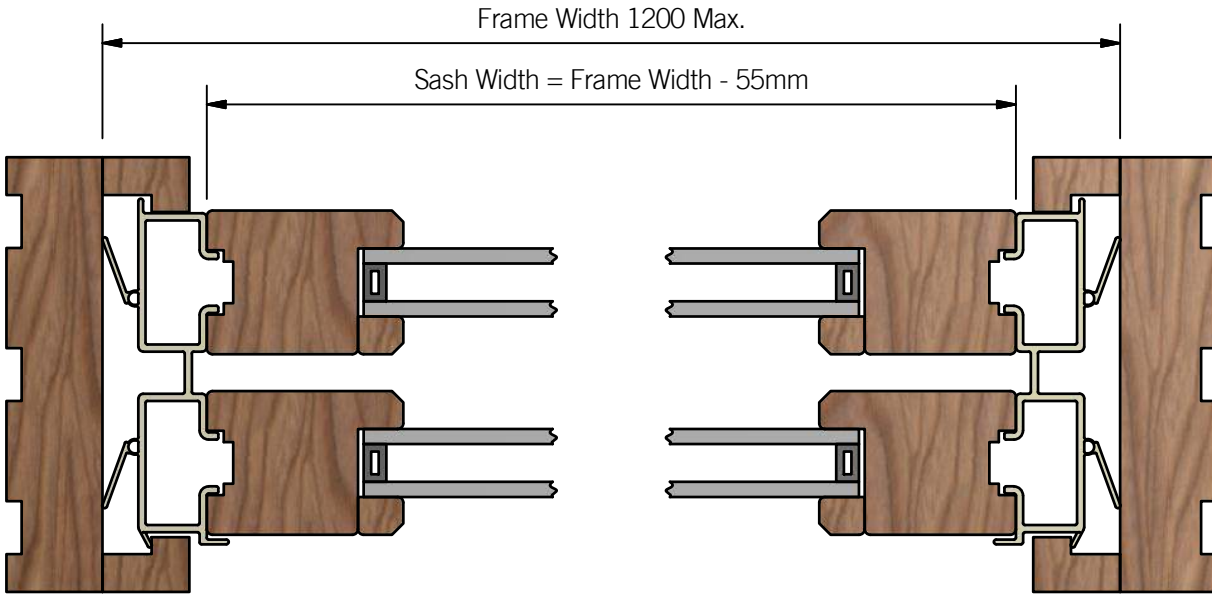


JAMB DETAIL

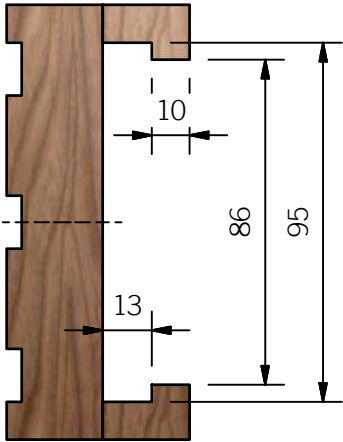


SASH DETAIL

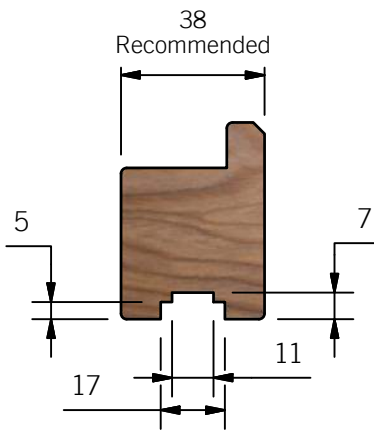

JAMBLINER CUTTING DETAIL

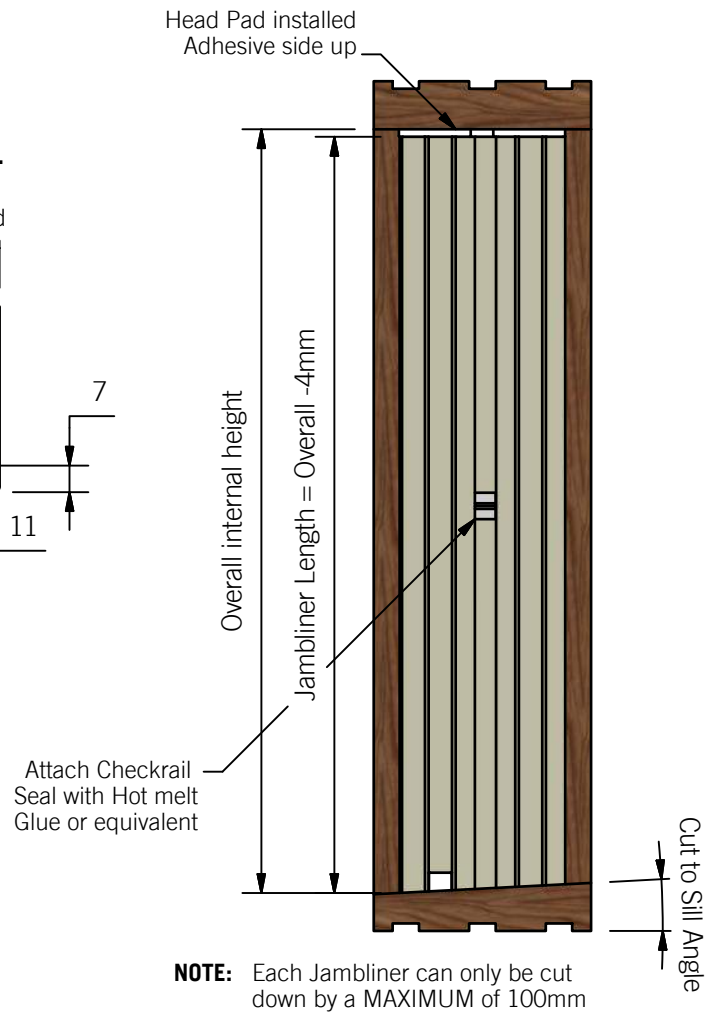

PIVOT PIN LOCATION

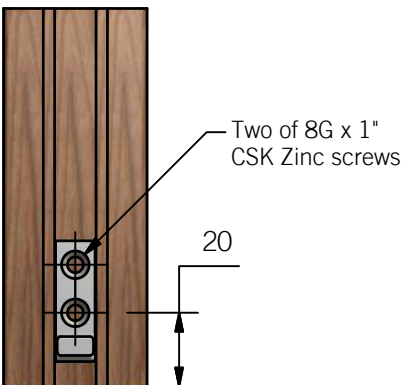

BALANCE CHART

Jambliner Length (mm)	Weight Range		Balance #	Qty (per Set)
	Min.	Max.		
900	3.2	5.0	14B	4
	4.5	7.0	14C	4
	6.4	10.0	14B	8
	9.0	14.0	14C	8
1000	3.2	5.0	16B	4
	4.5	7.0	16C	4
	6.4	10.0	16B	8
	9.0	14.0	16C	8
1100	4.1	6.0	18B	4
	5.9	8.0	18C	4
	8.2	10.0	18D	4
	8.2	12.0	18B	8
	11.8	16.0	18C	8
	16.4	20.0	18D	8
1200	4.5	6.0	20B	4
	6.4	8.0	20C	4
	8.2	10.0	20D	4
	9.0	12.0	20B	8
	12.8	16.0	20C	8
	16.4	20.0	20D	8
1300	4.5	7.0	22B	4
	7.3	10.0	22C	4
	9.5	11.0	22D	4
	9.0	14.0	22B	8
	14.6	20.0	22C	8
	19.0	22.0	22D	8
1400	5.0	8.0	24B	4
	7.7	10.0	24C	4
	10.0	11.0	24D	4
	11.4	13.0	24E	4
	10.0	16.0	24B	8
	15.4	20.0	24C	8
	20.0	22.0	24D	8
	22.8	26.0	24E	8
1500	5.0	8.0	26B	4
	7.7	10.0	26C	4
	10.0	12.0	26D	4
	13.6	15.0	26F	4
	15.5	17.0	26G	4
	10.0	16.0	26B	8
	15.4	20.0	26C	8
	20.0	24.0	26D	8
	27.2	30.0	26F	8
	31.0	34.0	26G	8
1600	5.5	8.0	28B	4
	8.2	10.0	28C	4
	10.5	13.0	28D	4
	11.0	16.0	28B	8
	16.4	20.0	28C	8
	21.0	26.0	28D	8
1700	5.9	9	30B	4
	8.6	11.0	30C	4
	10.9	13.0	30D	4
	11.8	18.0	30B	8
	17.2	22.0	30C	8
	21.8	26.0	30D	8

Jambliner Length (mm)	Weight Range		Balance #	Qty (per Set)
	Min.	Max.		
1600	5.5	8.0	28B	4
	8.2	10.0	28C	4
	10.5	13.0	28D	4
	11.0	16.0	28B	8
	16.4	20.0	28C	8
	21.0	26.0	28D	8
1700	5.9	9	30B	4
	8.6	11.0	30C	4
	10.9	13.0	30D	4
	11.8	18.0	30B	8
	17.2	22.0	30C	8
	21.8	26.0	30D	8
1800	6.4	9.0	32B	4
	9.1	11.0	32C	4
	11.4	14.0	32D	4
	13.6	15.0	32E	4
	12.8	18.0	32B	8
	18.2	22.0	32C	8
	22.8	28.0	32D	8
	27.2	30.0	32E	8
1900	7.3	10.0	34B	4
	10.0	12.0	34C	4
	14.6	20.0	34B	8
	20.0	24.0	34C	8
2000	7.3	10.0	36B	4
	10.0	12.0	36C	4
	12.3	15.0	36D	4
	14.6	20.0	36B	8
	20.0	24.0	36C	8
2100	24.6	30.0	36D	8
	7.3	10.0	38B	4
	10.0	12.0	38C	4
	12.3	15.0	38D	4
	14.5	15.0	38E	4
	14.6	20.0	38B	8
	20.0	24.0	38C	8
	24.6	30.0	38D	8
2200	29.0	30.0	38E	8
	10.0	12.0	40C	4
	12.3	14.5	40D	4
	15.5	15.0	40E	4
	20.0	24.0	40C	8
	24.6	29.0	40D	8
2300	31.0	30.0	40E	8
	10.0	12.0	42C	4
	12.3	15.0	42D	4
	15.8	18.0	42G	4
	18.2	20.0	42H	4
	19.5	20.0	42I	4
	20.0	24.0	42C	8
	24.6	30.0	42D	8
	31.6	36.0	42G	8
	36.4	40.0	42H	8
	39.0	40.0	42I	8
	2400	7.3	10.0	44B
10.0		12.0	44C	4
12.3		15.0	44D	4
16.8		18.0	44G	4
18.2		20.0	44H	4
14.6		20.0	44B	8
20.0		24.0	44C	8
24.6		30.0	44D	8
33.6		36	44G	8
36.4		40	44H	8

HOW TO USE CHART :

1. Identify Jambliner Length.
2. Looking right, find the respective Sash Weight Range
 - It is best to choose a range where your sash weight is as close to the middle as possible
3. Identify recommended Balance # and required quantity