FSA® FENESTRATION SOLUTIONS AUSTRALIA

CATALOGUE EVO HDS // TIMBER



A

۲

•

Q



0



WHAT WE STAND FOR

Everyday we live our overarching purpose; to make life better for our team, our customers and to drive our industry forward. To be better than yesterday and committed to a better tomorrow through everything we do.

Ultimately, we inspire architectural innovation and improve homes to create enjoyable and efficient lifestyles. We search the world over to source the most desirable, innovative and superior products available for the Australasian market. Combining stunning aesthetic design, state-of-the-art features, and first-class thermal efficiency, FSA introduces incredibly smart solutions for Australian window & door manufacturers and their customers.


Our experience and research reflects a detailed understanding of local and international markets, technical expertise and a dedication to exceptional customer service and streamlined support. This is exemplified in our extensive portfolio demonstrating our commitment to making life better.



www.fsa-aus.com.au



FEATURES & BENEFITS - FRENCH DOOR

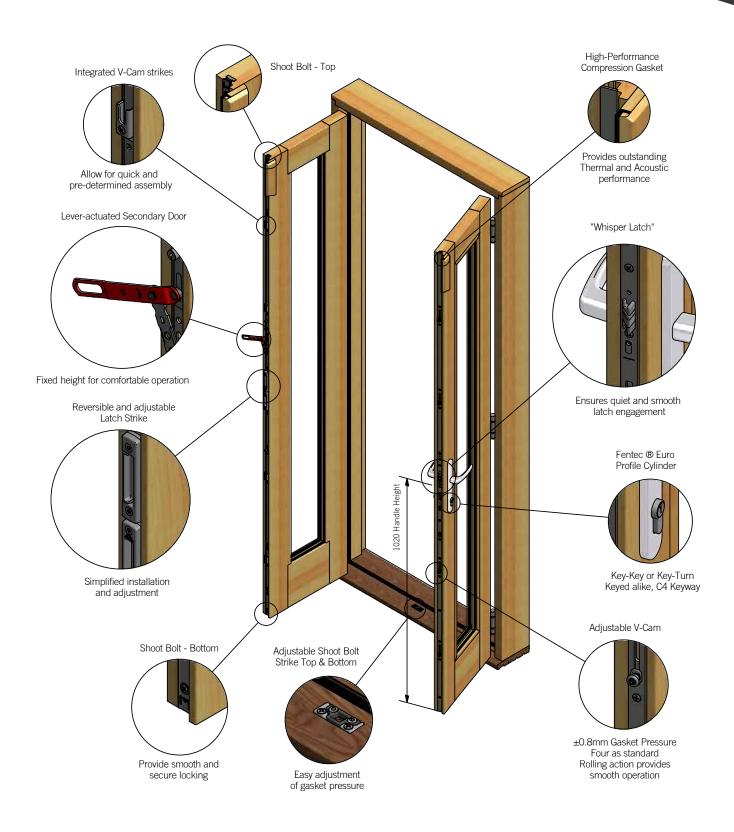


- The EVO™ HDS is designed around Roto Frank's world class DoorSafe Multipoint Hinged Door Locking system.
- The **EVOTM HDS** has a minimum of 7 adjustable locking points for French Doors.
- Locking points are easily engaged through operating Primary Door handle.





FSA

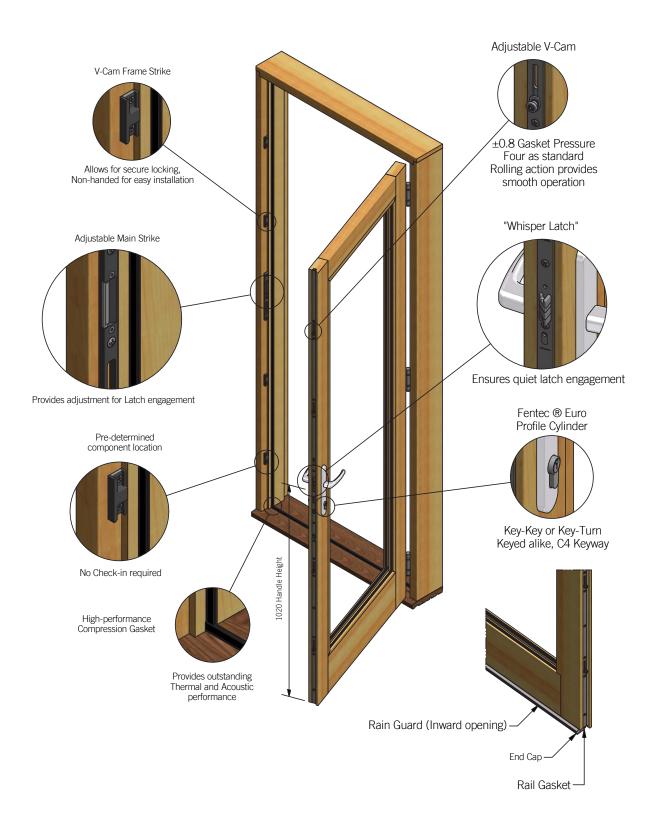

• The EVO™ HDS is designed around Roto Frank's world class DoorSafe H600 Multipoint Hinged Door Locking system


VO'

- The EVO™ HDS has a minimum of 5 adjustable locking points for Single Doors
- Locking points are easily engaged through operating Primary Door handle.

PROFILE CUTTER

FSA°

A custom made single-pass Spindle Moulder Cutter is available to profile the required features on the Locking Stile or Bottom Rail. Please contact FSA for further details or to place your order.

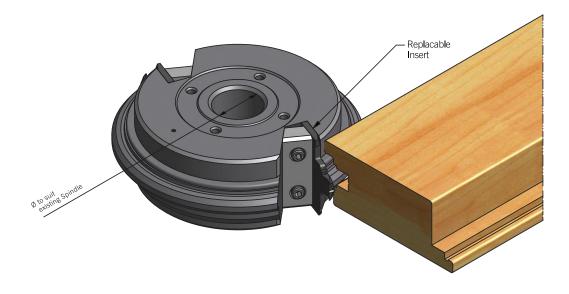

FRAME STRIKE

Jig is supplied 1820 long. Has to be cropped on the bottom based on Sash to Sill clearance and/or manufacturing process.

| | 1820 | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------------|--|
| The Strike Jig is supplied 1820 long, - has to be cropped on the bottom based on Sash to Sill clearance and / or manufacturing process. | | ermined Strike positioning. nded design. | |





FABRICATION INFORMATION

| |
|------|
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |





www.fsa-aus.com.au