



FSA[®]

FENESTRATION
SOLUTIONS
AUSTRALIA

EVO[®]
TIMBER SERVERY





MAKING
LIFE
BETTER

WHAT WE STAND FOR

Everyday we live our overarching purpose; to make life better for our team, our customers and to drive our industry forward. To be better than yesterday and committed to a better tomorrow through everything we do.

Ultimately, we inspire architectural innovation and improve homes to create enjoyable and efficient lifestyles. We search the world over to source the most desirable, innovative and superior products available for the Australasian market.

Combining stunning aesthetic design, state-of-the-art features, and first-class thermal efficiency, FSA introduces incredibly smart solutions for Australian window & door manufacturers and their customers.


Our experience and research reflects a detailed understanding of local and international markets, technical expertise and a dedication to exceptional customer service and streamlined support. This is exemplified in our extensive portfolio demonstrating our commitment to making life better.



www.fsa-aus.com.au


4	TECHNICAL SPECIFICATIONS Functions
5	TECHNICAL SPECIFICATIONS Applications
6	TECHNICAL SPECIFICATIONS Profiles Mounting Details
8	ORDERING INFORMATION FENTEC® Servery Kit
9	AUTOMATION ACCESSORIES Daisy Wall Mounted Controller Fentec® Rain Sensor Wind Sensor
10	GALLERY

FUNCTIONS

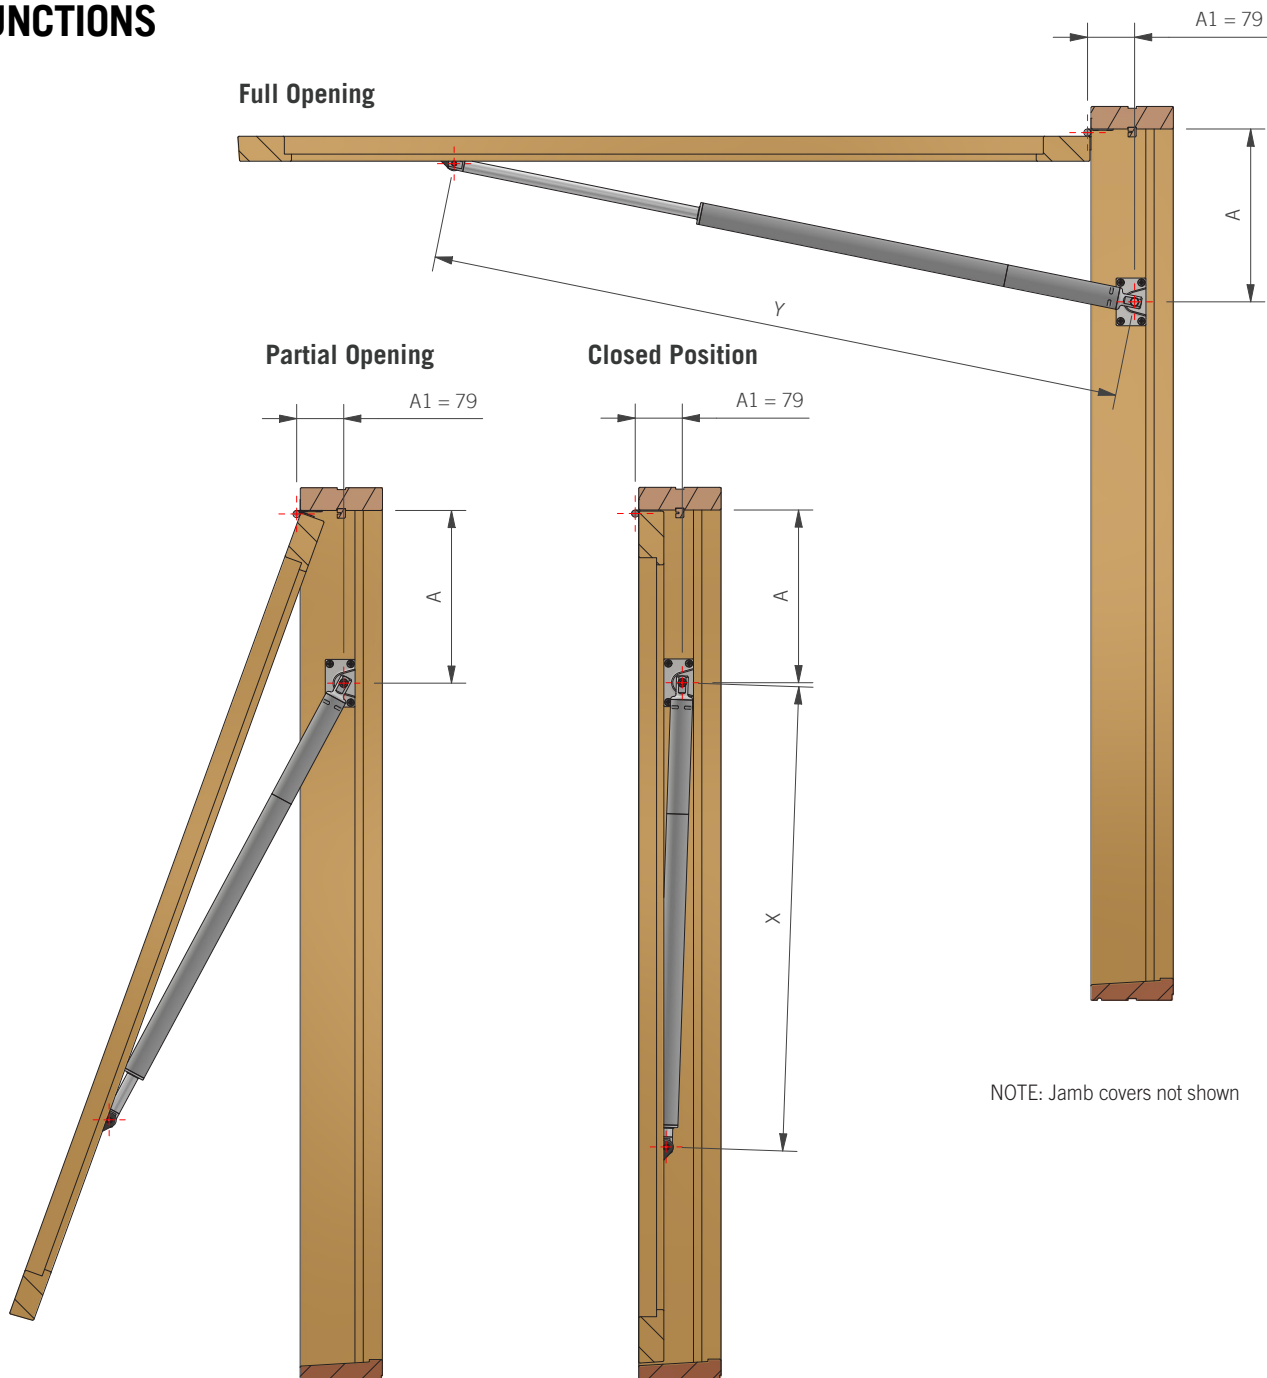

MOTOR SETS				
Set	Stoke	X	Y	Strength (N)
A	200	565	765	1200
B	300	665	965	1200
C	300	665	965	2500
D	400	765	1165	2500

POSITION	
Motor Pos.	A (mm)
1	70
2	140
3	198
4	290

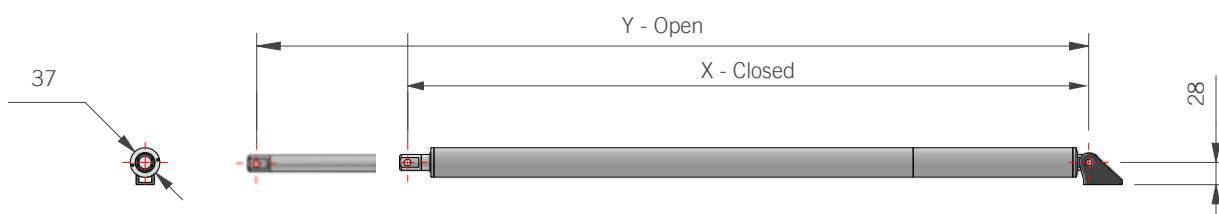


APPLICATIONS


Sash Height (mm)	Sash Width (mm)	Total Glass (mm)	Motor Set	Frame Pos. (A)
700	1200	8	A	1
		10		
	1500	8		
		10		
	1800	8		
		10		
900	1200	8	B	2
		10		
	1500	8		
		10		
	1800	8		
		10		
1200	1200	8	B	2
		10		3
		12		2
		16		3
	1500	8	C	2
		10		3
		12		3
		16		3
	1800	8	B	2
		10		3
		12		3
		16		3
	2000	8	C	2
		10		3
		12		3
		16		3
1500	1200	8	B	2
		10		3
		12		3
		16		3
	1500	8	C	3
		10		3
		12		3
		16		3
	1800	8	C	3
		10		3
		12		3
		16		3
	2000	8	C	3
		10		3
		12		3
		16		3
1800	1200	8	B	3
		10		3
		12		3
		16		3
	1500	8	C	3
		10		3
		12		3
		16		3
	1800	8	C	3
		10		3
		12		3
		16		3
	2000	8	C	3
		10		3
		12		3
		16		3

PROFILES


Jamb Profile

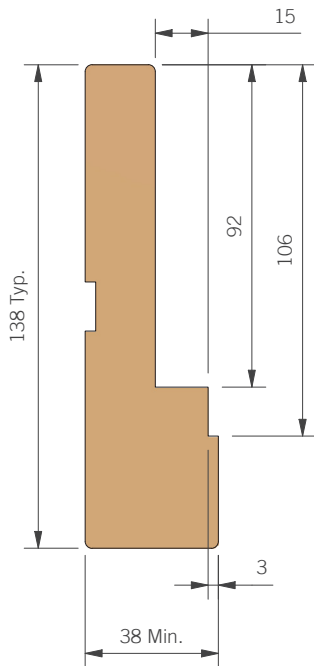


Jamb Cover Profile

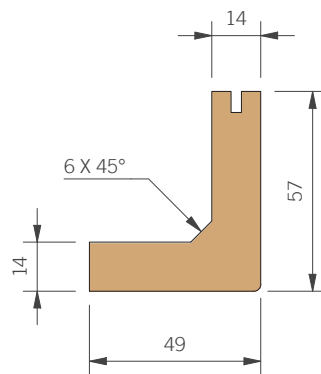


Sash Section - Stile Detail

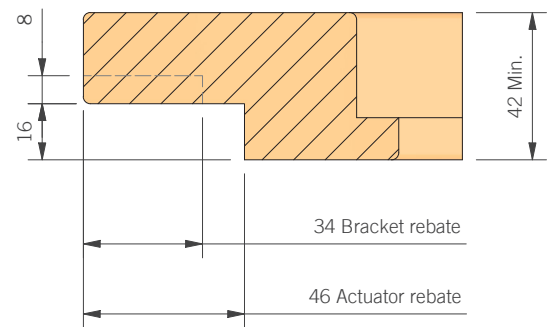

Head Profile - Typical


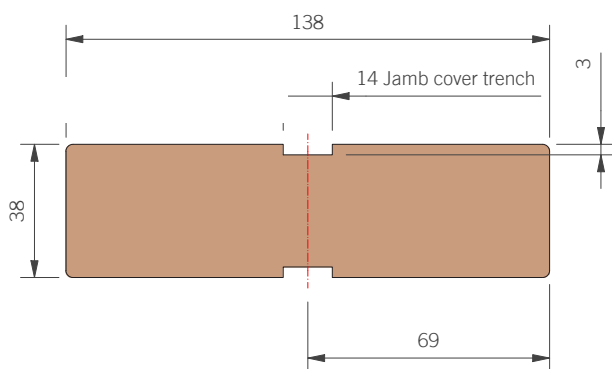


Sill Profile - Typical

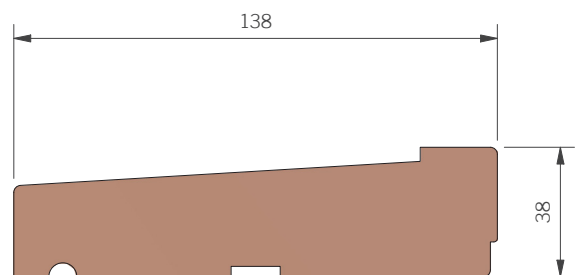


MOUNTING DETAILS



Frame Bracket Placement (Vertical position = "A" refer page 4)

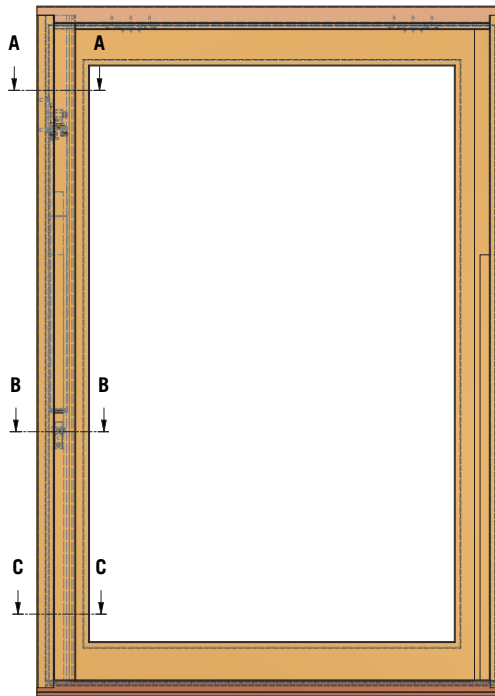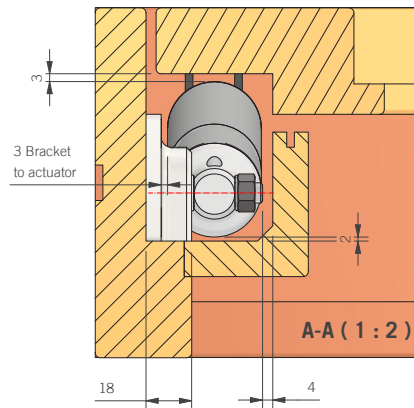


Sash bracket flush to rebate

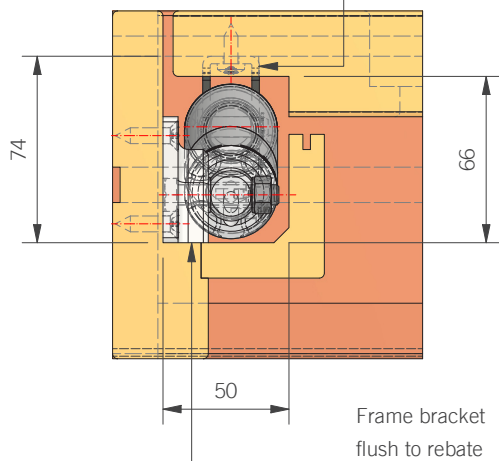

Sash Bracket Placement (Vertical position = "X" refer page 4)

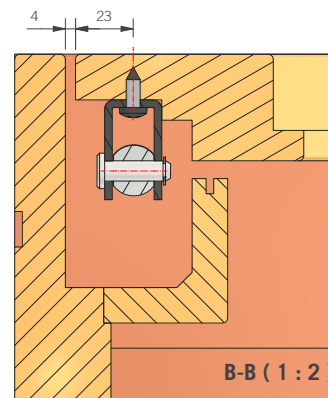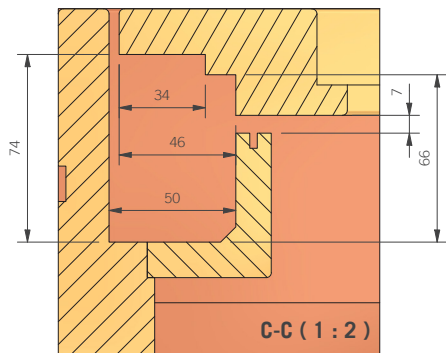

FENTEC® SERVERY KIT

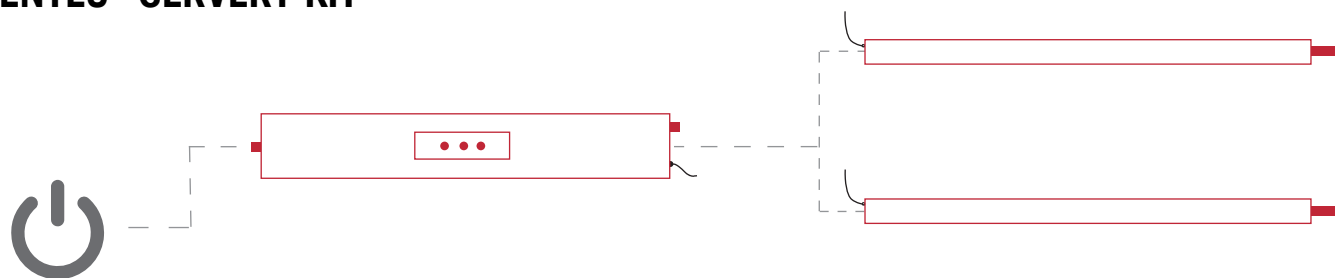

Optional Extras:



Daisy



Rain Sensor




Wall Mount Remote

FENTEC® AUTOMATED SERVERY KIT			
Part No.	Power Supply	Output	Motor Set
F-SERV-A	240V	24V	A
F-SERV-B	240V	24V	B
F-SERV-C	240V	24V	C
F-SERV-D	240V	24V	D

Key Features:

- Kit Fully Pre Programmed
- Closed 916mhz Frequency
- Dual Synchronised Actuators
- Simple touch pairing for additional remotes
- Optional Weather Sensors for climate control
- Optional Smart Phone control over Wi-Fi via “Daisy” application
- Bluetooth Smart Phone control via TMATE
- Possibility to incorporate blinds, awnings, louvres, as well as integration with Home Automation systems

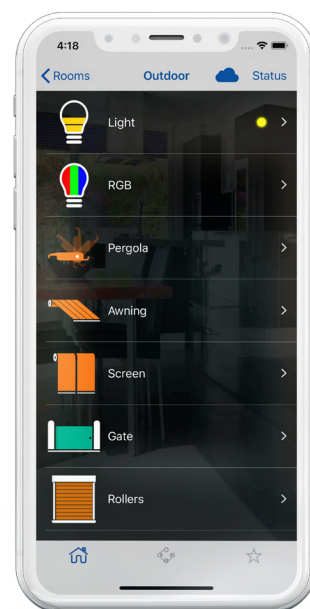

For the full range of accessories please refer to
FSA TELECO Catalogue for Full details.

DAISY



DAISY CONTROLLER VIA WIFI			
Part No.	Power Supply	Protection Rating	Dimensions
TE-DAISY	240V	IP20	115x65x40mm

Key Features

- Daisy lets you interact with all automated systems from anywhere in your home, even from a distance, with Smartphone or Tablet
- Simple to create scenes and programmable weekly timer
- Remote control via Wi-Fi through the creation of a free account in the Teleco Cloud
- Voice control of Teleco systems using the Google Home or Amazon assistant
- Compatible with any Android (version 4.4 and later) and iOS (version 10 and later) device. We recommend installing the latest version of the operating system.

WALL-MOUNTED CONTROL



3 COMMANDS FOR 1 MOTOR				
Part No.	Lithium Battery	Protection Rating	Dimensions	Colour
TE-WM3RWH	CR2430	IP20	86x86x9.5mm	White

Key Features

- Sleek wall mounted transmitter that can control multiple devices
- One touch programming keeping things simple and hassle free
- 916Mhz frequency for secure and robust transmitting

FENTEC® RAIN SENSOR KIT



240V RAIN SENSOR KIT - WIRELESS			
Part No.	Power Supply	Protection Rating	Dimensions
F-RAINW	24Vdc	IP65	130x50x37mm

Key Features

- Wireless connection
- LED indications for sensor status feedback sensor
- Heating function to avoid false activation due to ice or snow
- Programming magnet to configure the desired sensitivity and heating function without opening the device
- Fixing support supplied
- Equipped with automatic survival signalling

Full kit includes 240V power supply and 24Vdc transformer.

WIND SENSOR



WIND SENSOR WIRELESS		
Part No.	Protection Rating	Dimensions
TE-WIND	IP44	11x165x121mm

Key Features

- Compatible with the 4 motor controller kit
- Select from 8 wind speeds, from 40Km/hr to 75Km/hr
- Can be connected to up to 3 controllers
- Potential to manage up to 12 individual windows or 24 syncro motors





FSA[®]

www.fsa-aus.com.au